


公制外螺纹 24° 内锥面 轻系列

METRIC FEMALE 24° CONE SEAT L. T.

REF. DIN 3853/IOS 8434-1

10411

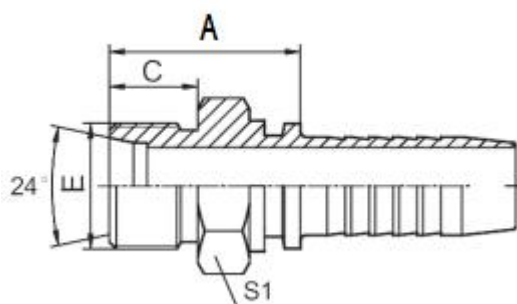

代号尺寸:

代 号 PART NO.		螺 纹 E THREAD E	软 管 HOSE SIZE		管子外径 TUBE O.D.	尺 寸 DIMENSIONS		
编织 BRAIDED	缠绕 SPIRAL		公称内径 DN	标号 DASH		A	C	S1
10411-12-04Z	-	M12X1.5	6	4	6	20.5	10	12
10411-14-04Z	-	M14X1.5	6	4	8	20.5	10	14
10411-14-05Z	-	M14X1.5	8	5	8	21.5	10	14
10411-16-04Z	-	M16X1.5	6	4	10	22.5	11	17
10411-16-05Z	-	M16X1.5	8	5	10	22.5	11	17
10411-16-06Z	10412-16-06Z	M16X1.5	10	6	10	22.5	11	17
10411-18-05Z	-	M18X1.5	8	5	12	23.5	11	19
10411-18-06Z	10412-18-06Z	M18X1.5	10	6	12	22.5	11	19
10411-22-06Z	10412-22-06Z	M22X1.5	10	6	15	24.5	12	24
10411-22-08Z	10412-22-08Z	M22X1.5	12	8	15	26	12	24
10411-26-08Z	10412-26-08Z	M26X1.5	12	8	18	26.5	12	27
10411-26-10Z	10412-26-10Z	M26X1.5	16	10	18	26.5	12	27
10411-27-10Z	10412-27-10Z	M27X1.5	16	10	18	29.5	14	30
10411-30-10Z	10412-30-10Z	M30X2	16	10	22	29.5	14	32
10411-30-12Z	10412-30-12Z	M30X2	20	12	22	30	14	32

10411-36-16Z	10412-36-16Z	M36X2	25	16	28	31.5	14	38
10411-45-20Z	10412N-45-20Z	M45X2	32	20	35	37/39.6	16	46
10411-52-24Z	10412N-52-24Z	M52X2	40	24	42	38/41	16	55

注：1.尺寸 A 中"/"前尺寸适用于编织管接头,"/"后尺寸适用于缠绕管接头。

Notes: 1.The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.